

PROJECT NEWS



Jakob-Kaiser-Haus

Berlin, Germany

Jakob-Kaiser-Haus (The Office for Members of Parliament) is located adjacent to the home of the German Parliament, the "Reichstag" building in Berlin, Germany. The government office complex consists of nine buildings, one of which includes the official residence for the President of the Imperial Parliament.

In the parliament member's office building, Fujitec installed 32 elevators, including uniquely designed observation models. In addition, there are two autowalks installed underground connecting the office and parliament buildings.

In the parliament building itself, Fujitec installed twenty-two elevators that use a great amount of glass. As a whole, a total of 56 Fujitec units are operating in these two central facilities of the German Parliament.



Owner :


Bundesbaugesellschaft Berlin mbH

Architect :

Schweger & Partner;
van den Valentyn;
Busmann & Haberer;
von Gerkan, Marg & Partner; and
de Architekten Cie.

Contractor :

Wierner & Trachte AG;
F.C. Trapp AG; and
C. Baresel AG

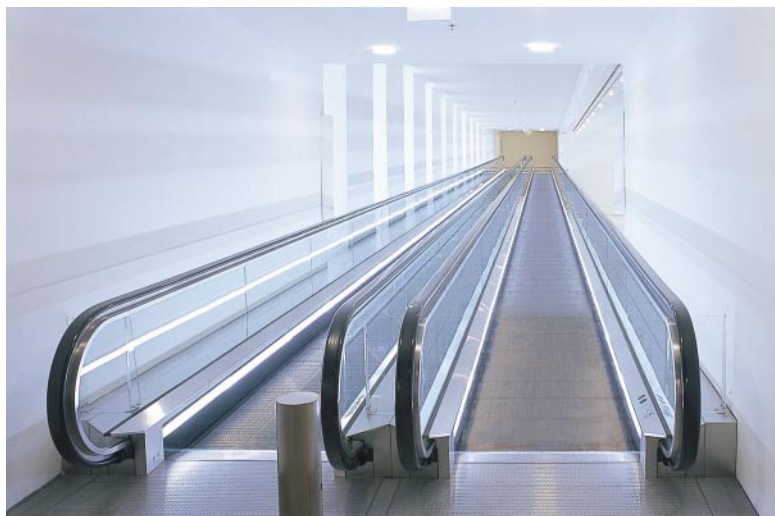

Jakob-Kaiser-Haus

1. Site : Berlin, Germany

2. Building : 8-story Office Building (2 below ground)

3. Specifications

Elevators:

Use	Elevator Control	Capacity (kg)	Speed (mpm)	Stops/Floors	Units	Operation
O	AC-Geared (VVVF)	1,600	120	10/10	2	2SC
O	AC-Geared (VVVF)	1,125	120	8/8	2	2SC
O	AC-Geared (VVVF)	1,125	120	10/10	2	2SC
O	AC-Geared (VVVF)	1,125	120	9/9	2	2SC
O	AC-Geared (VVVF)	1,600	120	10/10	2	FLEX-8810(2GSO)
O	AC-Geared (VVVF)	1,125	120	9/9	2	FLEX-8810(2GSO)
O	AC-Geared (VVVF)	1,600	96	8/8	1	SC
O	AC-Geared (VVVF)	1,600	96	8/8	1	SC
O	AC-Geared (VVVF)	1,125	96	8/8	2	2SC
O	AC-Geared (VVVF)	1,125	96	8/8	2	2SC
P	AC-Geared (VVVF)	900	60	4/4	1	SC
P	AC-Geared (VVVF)	1,350	48	4/4	1	SC
P	AC-Geared (VVVF)	630	48	4/4	2	SC
S	Hydraulic (Direct)	630	37.8	2/2	1	SC
S	Hydraulic (Direct)	900	37.8	2/2	1	SC
S	Hydraulic (Direct)	1,350	37.8	2/2	1	SC
S	Hydraulic (Direct)	1,450	37.8	2/2	2	2SC
S	Hydraulic (Direct)	2,000	37.8	2/2	1	SC
S	Hydraulic (Direct)	2,500	37.8	2/2	1	SC
S	Hydraulic (Direct)	1,150	37.8	2/2	2	2SC
D	—————	300	18	2/2	1	

Total : 32 Units

(NOTES) O: Observation
P: Passenger
S: Service
D: Dumbwaiter
VVVF: Variable Voltage Variable Frequency
2GSO: 2-Car Group Supervisory Operation
2SC: 2-Car Selective Collective Operation
SC: 1-Car Selective Collective Operation

Autowalks:

Type	Model	Speed (mpm)	Effective Length (mm)	Units
PLS-SL	1200	39	40,955	2

Total : 2 Units

(NOTE) PLS-SL: Glass balustrade